REVISIONS					
ZONE	REV.	DESCRIPTION	DATE	DRAWN	APPROVED
C2	01	Internal diameter enlarged, 4 half-depth holes added	12-Jul-2017	Michael A.	Noam A.
F8	02	Material changed by manufacturer's request	15-Sep-2025	Michael A.	Ron N.

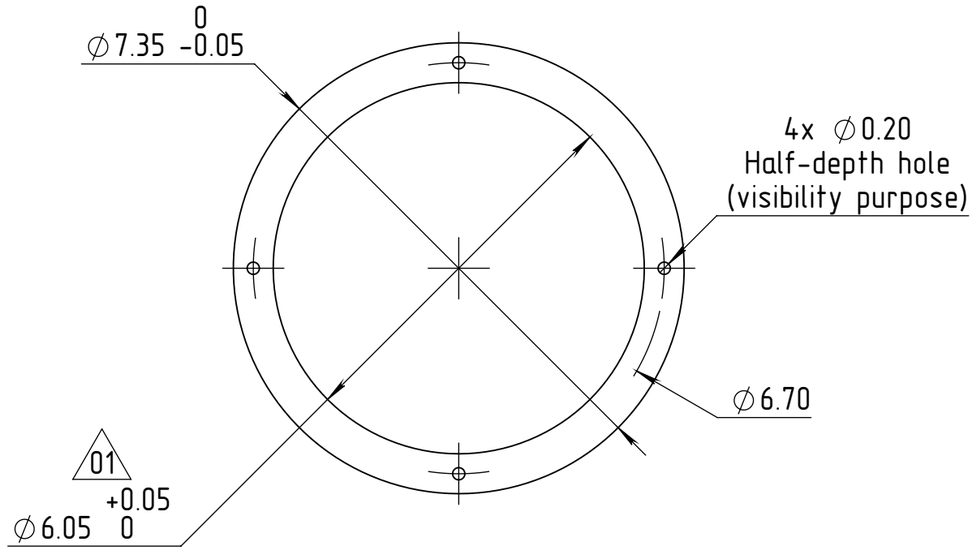

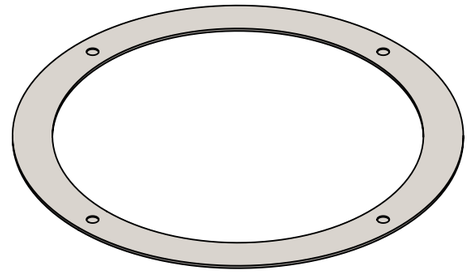

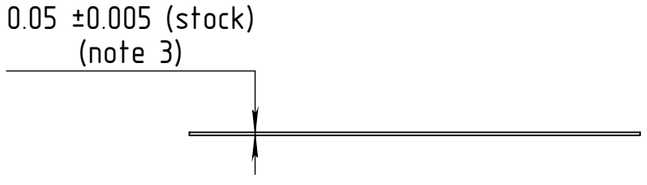

FOR DS-25-R-00

Notes:
1. For any incompatibility with the model or missing dimension, please refer to Netzer for clarification.
2. Burrs are not allowed.
3. The thickness feature must be controlled after the cut.
4. Packing must prevent physical damage during process storage and shipment

The information contained in this drawing is the sole property ot Netzer Precision Position Sensors A.C.S. ltd. Any reproduction in part or whole without the written permission of Netzer Precision Position Sensors A.C.S. ltd. is prohibited. The drawing is confidential, and is the property of Netzer Precision ltd. It must not be disclosed to a third party without written consent of Netzer Precision ltd.

	NAME	SIGNATURE	DATE
DRAWN	Michael Agami	MA	14-Dec-2015
CHK'D	Jacob Hefer	JH	14-Dec-2015
APPV'D	Jacob Hefer	JH	14-Dec-2015

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN: mm SURFACE FINISH: N6
0.5 - 4.9: ±0.05 mm
31 - 120: ±0.15 mm
401 - 1000: ±0.3 mm
5 - 30: ±0.1 mm
121 - 400: ±0.2 mm
1001 - 2000: ±0.5 mm
Between holes: ±0.05 mm Angles: ±0.5°
On all edges make chamfer 0.1 mm x 45°

Netzer Precision Position Sensors A.C.S. ltd.

TITLE: DS-25 spacer for rotor 0.05 mm
MATERIAL: Stainless Steel 302/304
PROJECT : DS-25
CAT NO. : MP-03493
02
Coating:
Revision : 02
SCALE: 10:1
A3
SHEET 1 OF 1