


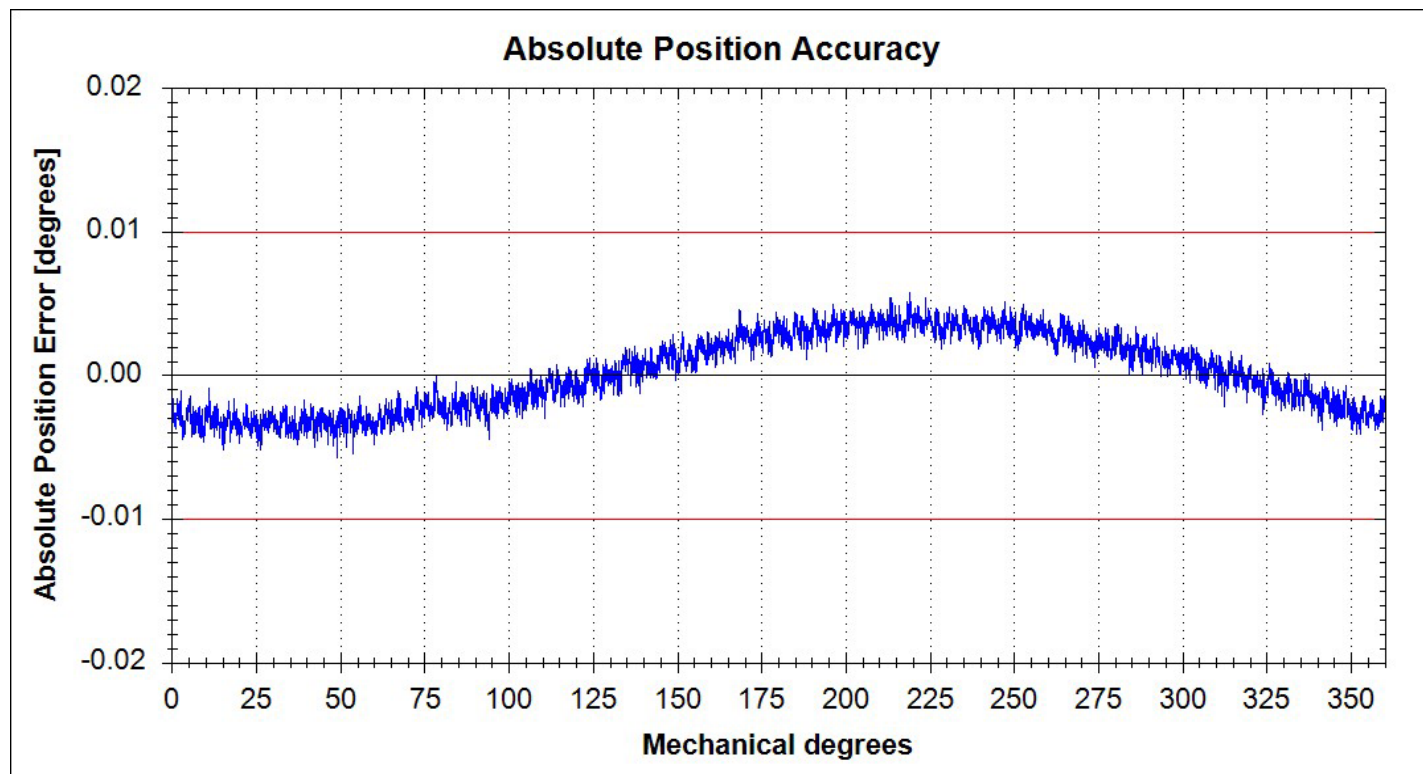

Number of sampled points: 3600

Error [degrees]: ± 0.0058

Error limit [degrees]: ± 0.0100

Encoder parameters	
CAT#	VLP-60-SG-S0
Serial Number	262500030
Resolution	262144 (18 bits)
ECR: Fn/Crs/Med	32/3/-
BIT	Disabled
FW version	4.3.14
UUT revision	13009009



Average Amplitudes and Offsets[mV]

Fine	Min	Actual	Max
Amplitude	200	300	500
Sine offset	-40	1.29	40
Cosine offset	-40	1.80	40

Coarse	Min	Actual	Max
Amplitude	100	209	300
Sine offset	-50	-10.63	50
Cosine offset	-50	5.60	50

Medium	Min	Actual	Max
Amplitude	N/A	N/A	N/A
Sine offset	N/A	N/A	N/A
Cosine offset	N/A	N/A	N/A

Tested by: Ira V.

Date: 14/06/2026 16:41

Tested with SW version: 9.3.1

Status: Passed