


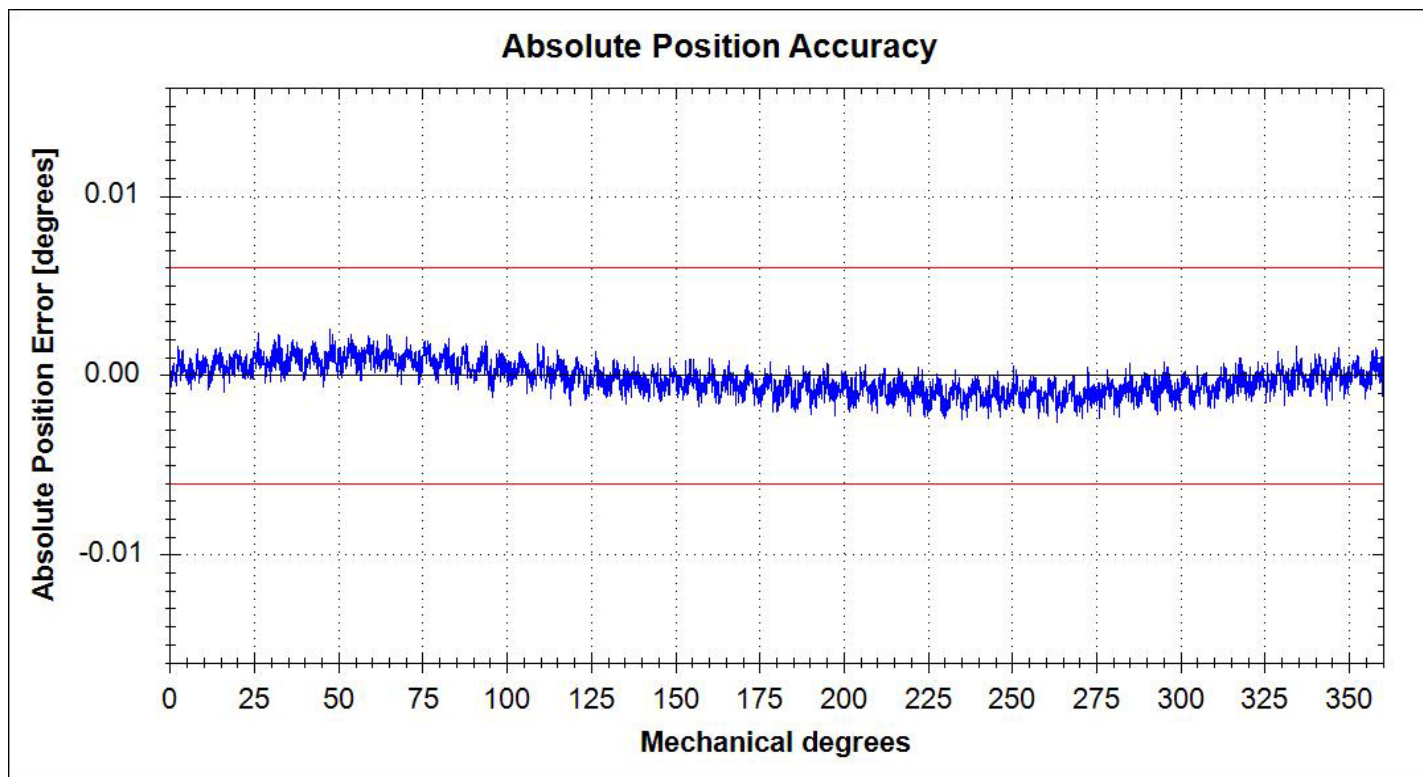

Number of sampled points: 3600

Error [degrees]: ± 0.0026

Error limit [degrees]: ± 0.0060

Encoder parameters	
CAT#	VLP-80-SH-S0
Serial Number	242400091
Resolution	524288 (19 bits)
ECR: Fn/Crs/Med	64/3/8
BIT	Disabled
FW version	4.3.14
UUT revision	5



Average Amplitudes and Offsets[mV]

Fine	Min	Actual	Max
Amplitude	200	350	510
Sine offset	-20	-8.11	20
Cosine offset	-20	0.86	20

Coarse	Min	Actual	Max
Amplitude	100	148	300
Sine offset	-50	-4.09	50
Cosine offset	-50	-7.61	50

Medium	Min	Actual	Max
Amplitude	30	60	100
Sine offset	-30	-1.36	30
Cosine offset	-30	-0.14	30

Tested by: Natalya B.

Date: 10/06/2024 12:21

Tested with SW version: 6.17.0

Status: Passed