


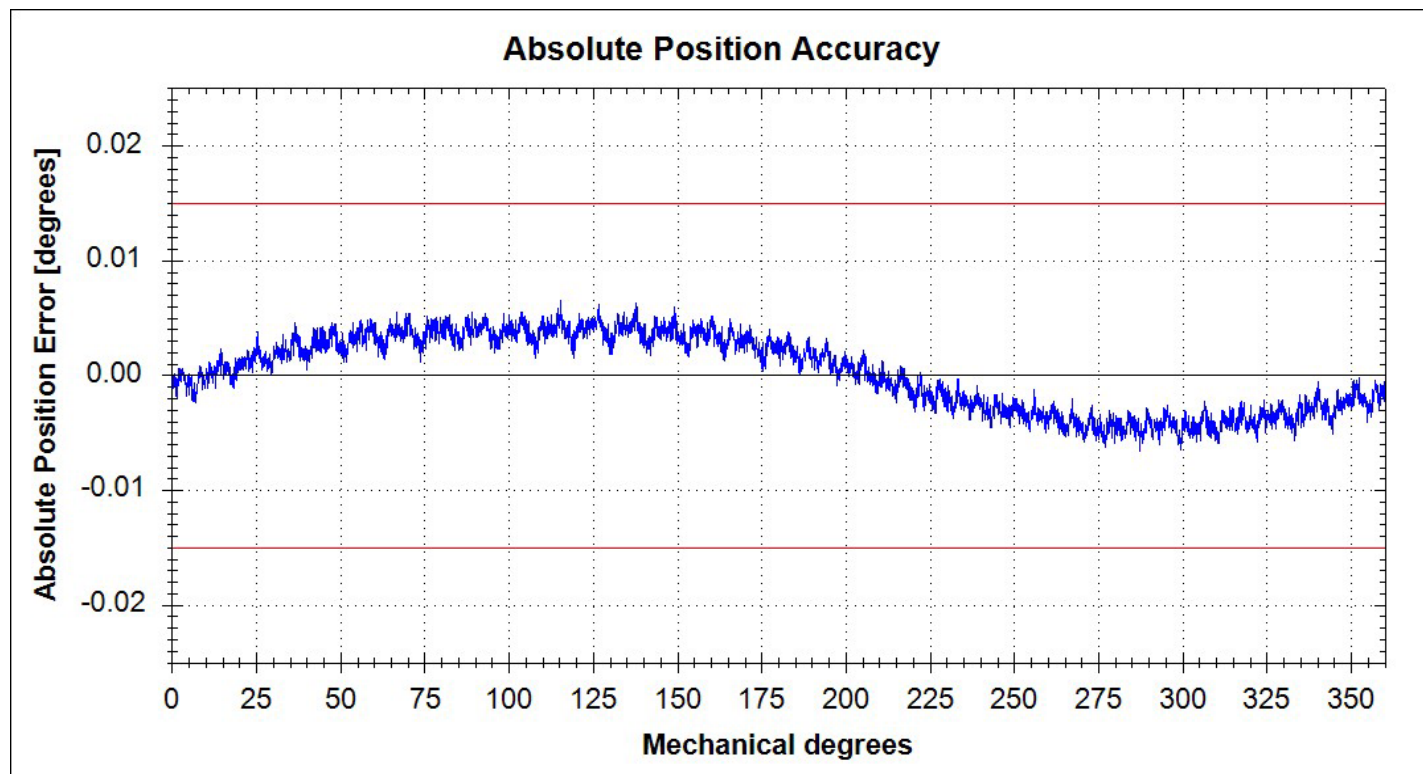

Number of sampled points: 3600

Error [degrees]: ± 0.0066

Error limit [degrees]: ± 0.0150

Encoder parameters	
CAT#	VLX-60-SG-CH
Serial Number	263100183
Resolution	262144 (18 bits)
ECR: Fn/Crs/Med	32/3/-
BIT	Disabled
FW version	4.3.14
UUT revision	9021026



Average Amplitudes and Offsets[mV]

Fine	Min	Actual	Max
Amplitude	200	300	500
Sine offset	-40	1.29	40
Cosine offset	-40	2.01	40

Coarse	Min	Actual	Max
Amplitude	100	205	300
Sine offset	-50	-7.18	50
Cosine offset	-50	3.37	50

Medium	Min	Actual	Max
Amplitude	N/A	N/A	N/A
Sine offset	N/A	N/A	N/A
Cosine offset	N/A	N/A	N/A

Tested by: Ekaterina G.

Date: 29/07/2026 10:35

Tested with SW version: 9.3.1

Status: Passed