


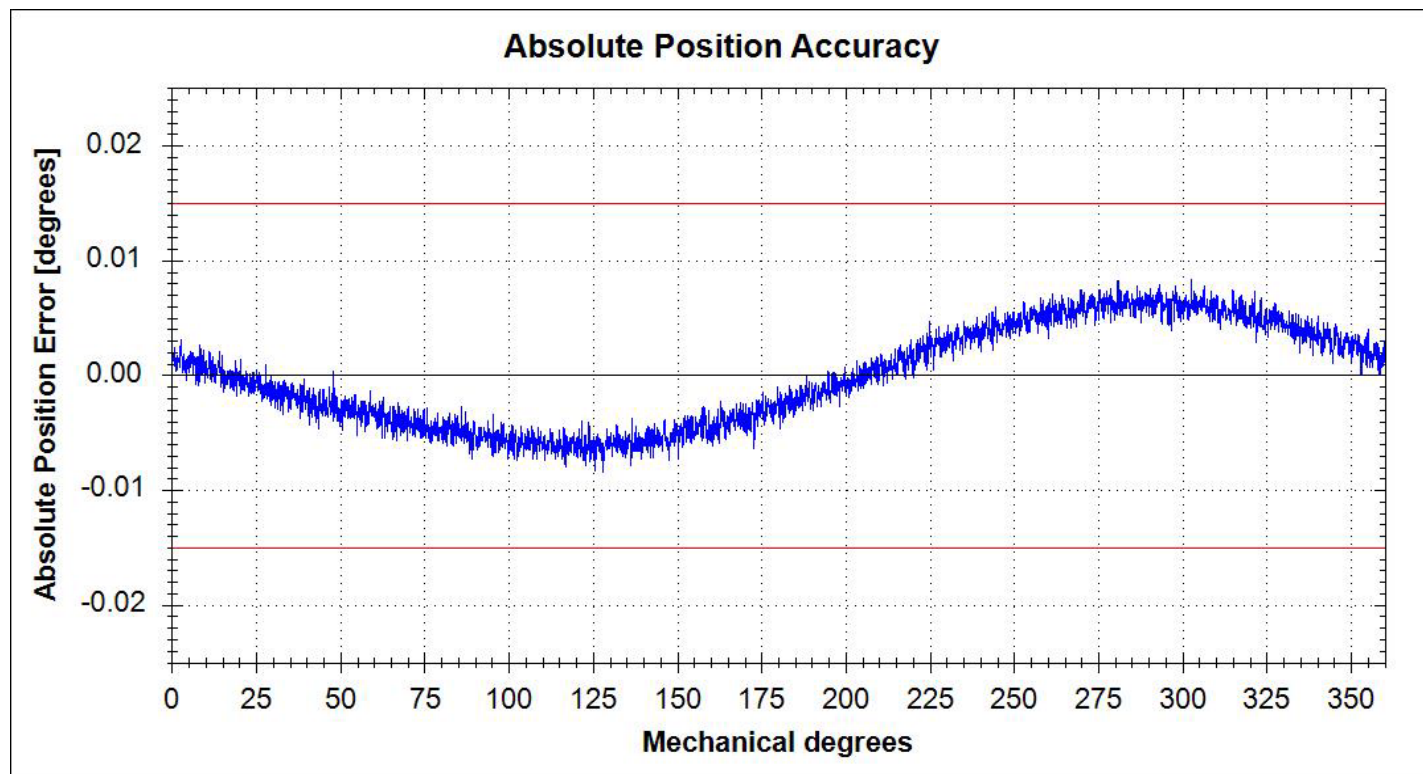

Number of sampled points: 3600

Error [degrees]: ± 0.0084

Error limit [degrees]: ± 0.0150

Encoder parameters	
CAT#	VLP-100-SH-S0
Serial Number	223300132
Resolution	524288 (19 bits)
ECR: Fn/Crs/Med	32/3/-
BIT	Disabled
FW version	4.3.5
UUT revision	0



Tested by: Natalia Kh.

Date: 15/08/2022 14:57

Tested with SW version: 5.2.4

Status: Passed

Average Amplitudes and Offsets[mV]

Fine	Min	Actual	Max
Amplitude	190	310	500
Sine offset	-20	-2.15	20
Cosine offset	-20	1.08	20

Coarse	Min	Actual	Max
Amplitude	120	246	520
Sine offset	-100	-42.37	100
Cosine offset	-100	35.97	100

Medium	Min	Actual	Max
Amplitude	N/A	N/A	N/A
Sine offset	N/A	N/A	N/A
Cosine offset	N/A	N/A	N/A