


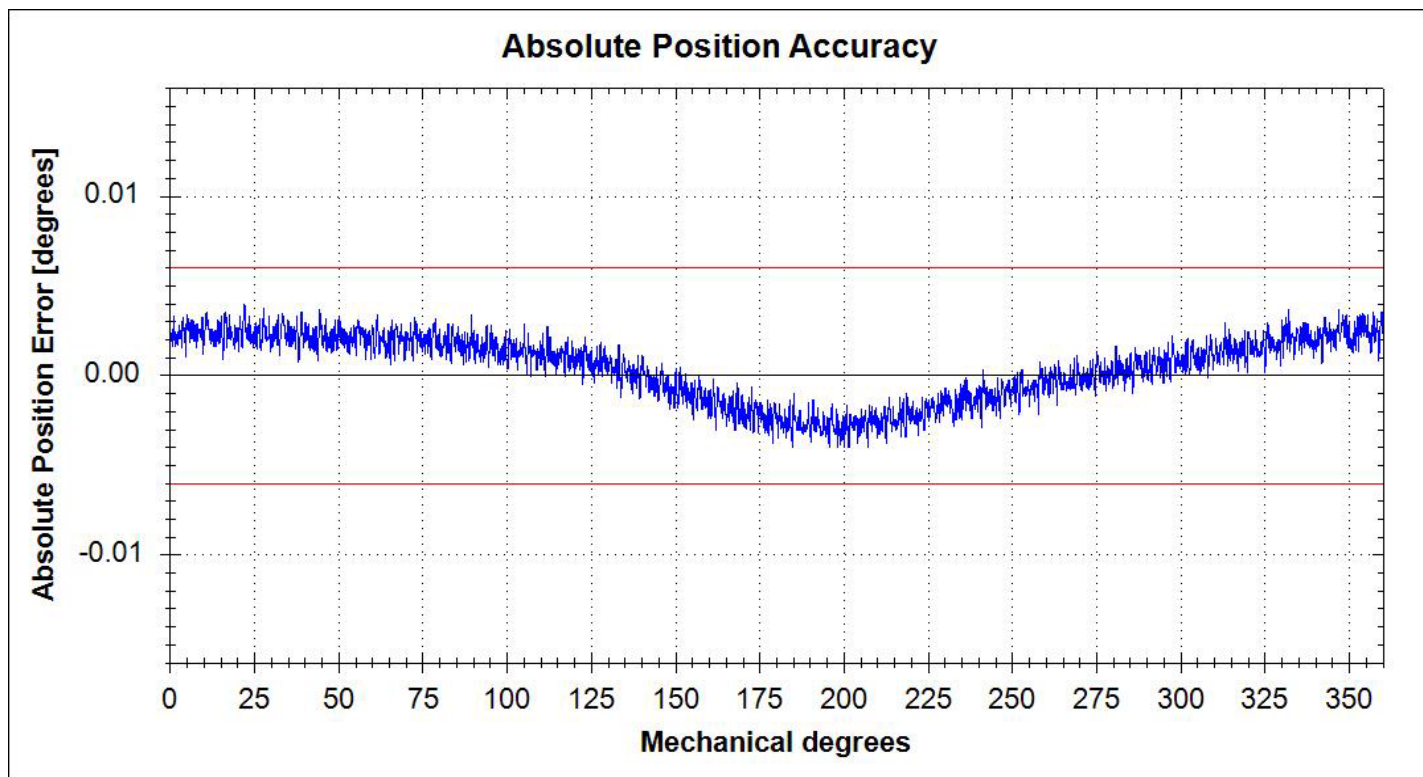

Number of sampled points: 3600

Error [degrees]: ± 0.0040

Error limit [degrees]: ± 0.0060

Encoder parameters	
CAT#	VLP-140-SJ-S1
Serial Number	240600481
Resolution	2097152 (21 bits)
ECR: Fn/Crs/Med	64/3/8
BIT	Disabled
FW version	4.3.11
UUT revision	1



Average Amplitudes and Offsets[mV]

Fine	Min	Actual	Max
Amplitude	200	348	510
Sine offset	-20	-1.94	20
Cosine offset	-20	0.57	20

Coarse	Min	Actual	Max
Amplitude	100	150	300
Sine offset	-50	-16.59	50
Cosine offset	-50	9.62	50

Medium	Min	Actual	Max
Amplitude	30	43	100
Sine offset	-30	-0.65	30
Cosine offset	-30	0.07	30

Tested by: Natalya M.

Date: 12/02/2024 10:42

Tested with SW version: 6.13.0

Status: Passed