


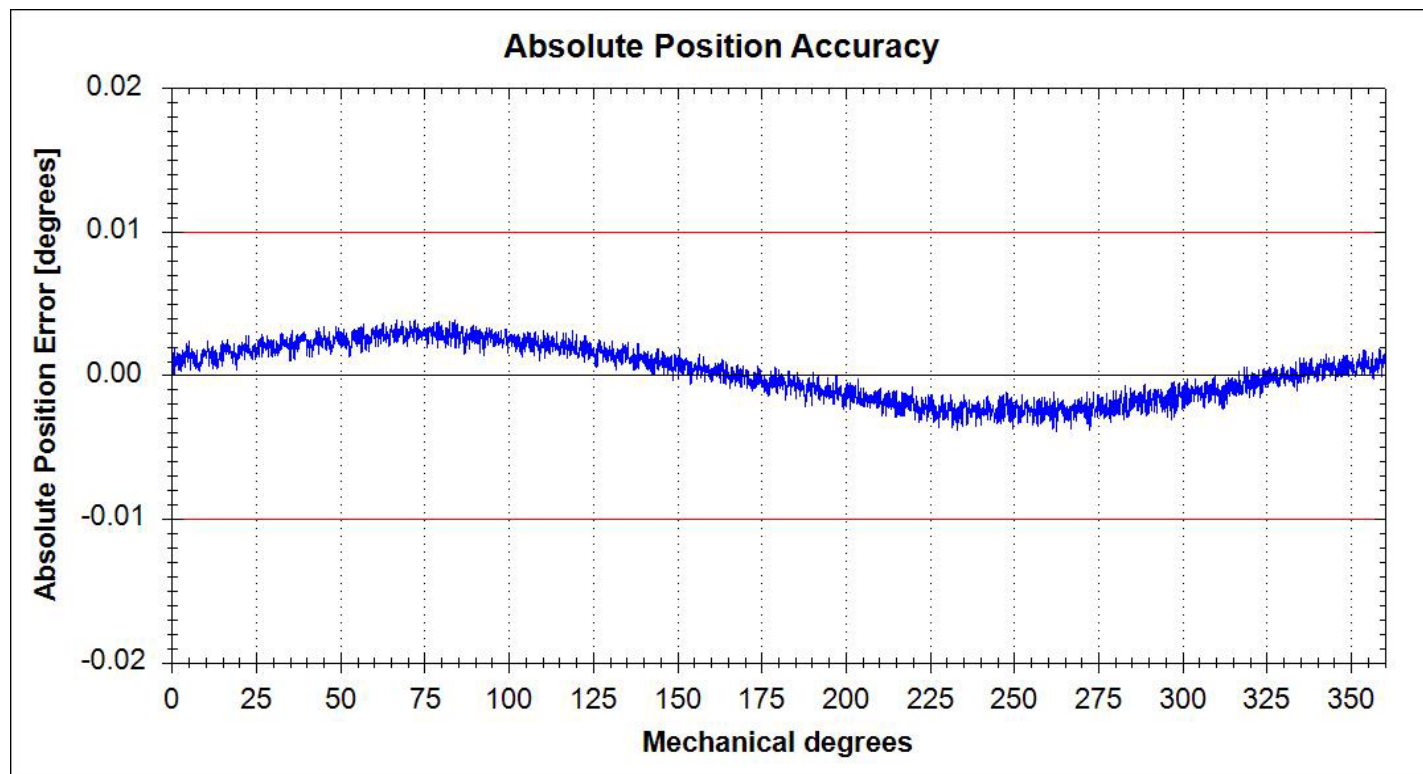

Number of sampled points: 3600

Error [degrees]: ± 0.0039

Error limit [degrees]: ± 0.0100

Encoder parameters	
CAT#	VLP-170-SH-S0
Serial Number	225100071
Resolution	524288 (19 bits)
ECR: Fn/Crs/Med	64/3/8
BIT	Disabled
FW version	4.3.9
UUT revision	1



Tested by: Ira V.

Date: 02/02/2023 15:01

Tested with SW version: 6.0.0

Status: Passed

Average Amplitudes and Offsets[mV]

Fine	Min	Actual	Max
Amplitude	200	355	510
Sine offset	-15	-1.80	15
Cosine offset	-15	2.80	15

Coarse	Min	Actual	Max
Amplitude	100	146	300
Sine offset	-40	7.68	40
Cosine offset	-40	1.29	40

Medium	Min	Actual	Max
Amplitude	30	60	100
Sine offset	-20	-0.65	20
Cosine offset	-20	-0.43	20