


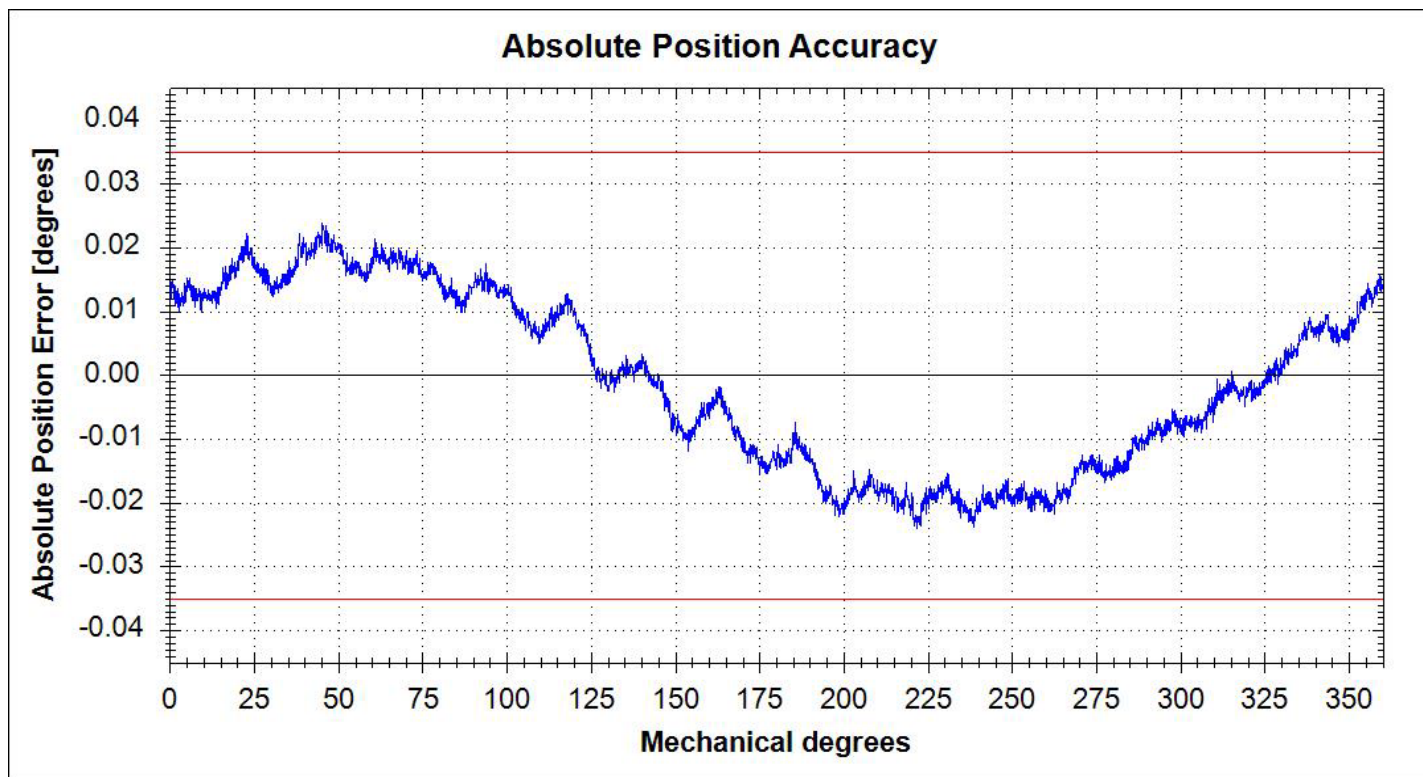

Number of sampled points: 3600

Error [degrees]: ± 0.0239

Error limit [degrees]: ± 0.0350

Encoder parameters	
CAT#	VLP-25-SJ-S0
Serial Number	245100074
Resolution	2097152 (21 bits)
ECR: Fn/Crs/Med	16/3/-
BIT	Disabled
FW version	4.3.14
UUT revision	0



Tested by: Alex F.

Date: 18-12-2024 14:37

Tested with SW version: 6.21.0

Status: Passed

Average Amplitudes and Offsets[mV]

Fine	Min	Actual	Max
Amplitude	200	323	500
Sine offset	-130	-55.29	130
Cosine offset	-130	54.21	130

Coarse	Min	Actual	Max
Amplitude	100	206	350
Sine offset	-180	-79.70	180
Cosine offset	-180	26.64	180

Medium	Min	Actual	Max
Amplitude	N/A	N/A	N/A
Sine offset	N/A	N/A	N/A
Cosine offset	N/A	N/A	N/A