


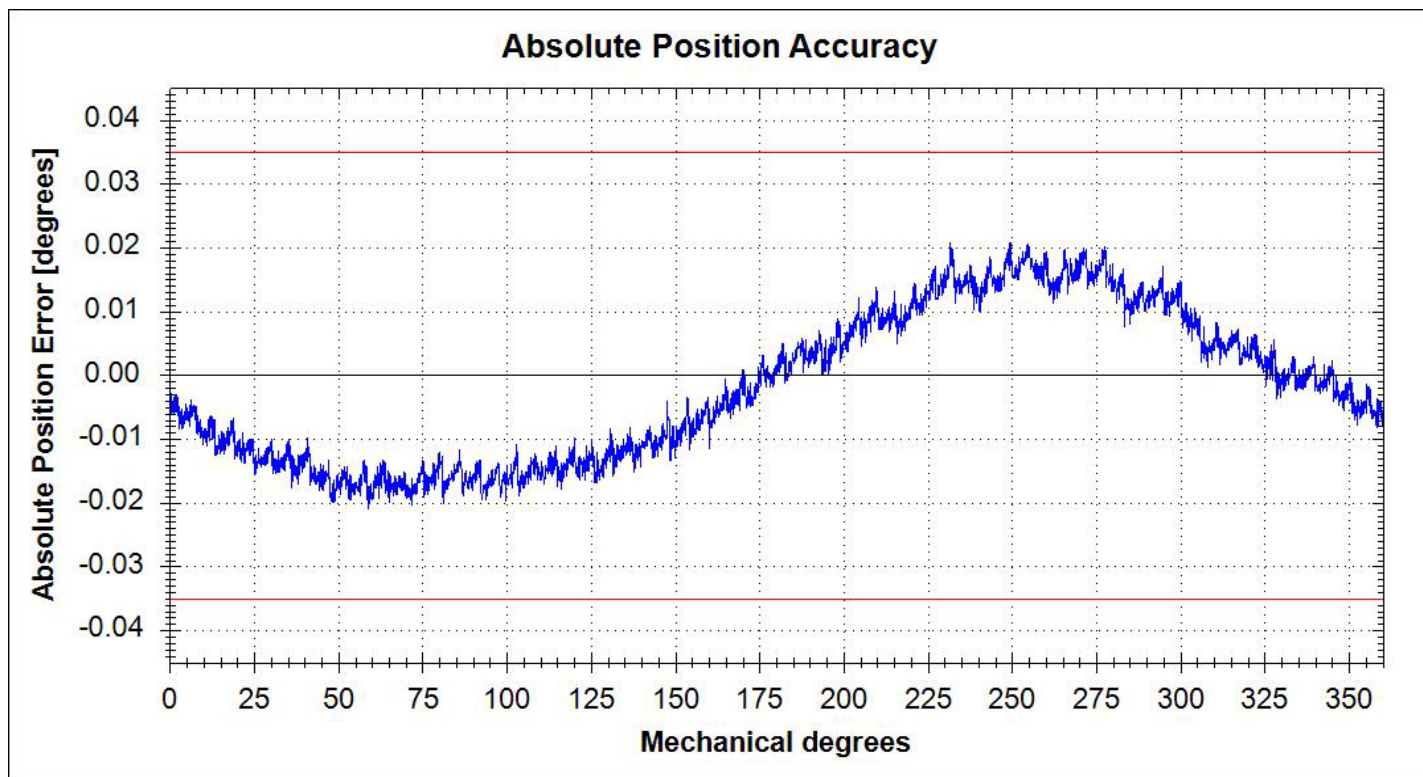

Number of sampled points: 3600

Error [degrees]: ± 0.0210

Error limit [degrees]: ± 0.0350

Encoder parameters	
CAT#	VLP-35-IHB-S4H
Serial Number	251300044
Resolution	524288 (19 bits)
ECR: Fn/Crs/Med	16/15/-
BIT	Enabled
FW version	6.1.111
UUT revision	0



Tested by: Oksana S.

Date: 25/03/2025 11:23

Tested with SW version: 8.0.5

Status: Passed

Average Amplitudes and Offsets[mV]

Fine	Min	Actual	Max
Amplitude	140	234	520
Sine offset	-30	7.40	30
Cosine offset	-30	3.02	30

Coarse	Min	Actual	Max
Amplitude	50	132	350
Sine offset	-35	-10.56	35
Cosine offset	-35	13.21	35

Medium	Min	Actual	Max
Amplitude	N/A	N/A	N/A
Sine offset	N/A	N/A	N/A
Cosine offset	N/A	N/A	N/A