


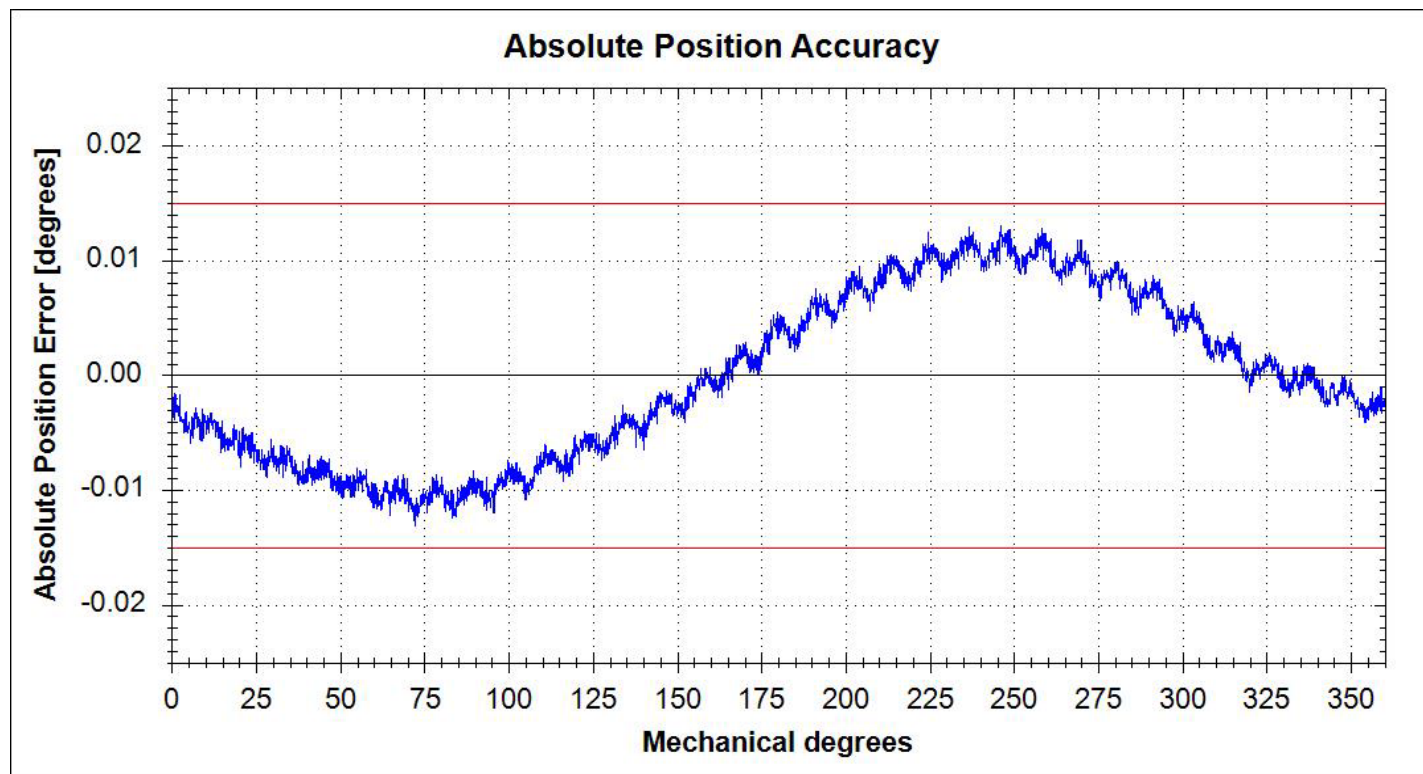

Number of sampled points: 3600

Error [degrees]: ± 0.0131

Error limit [degrees]: ± 0.0150

Encoder parameters	
CAT#	VLP-60-IIB-S0-EA
Serial Number	221500162
Resolution	1048576 (20 bits)
ECR: Fn/Crs/Med	32/3/-
BIT	Enabled
FW version	4.3.5
UUT revision	0



Average Amplitudes and Offsets[mV]

Fine	Min	Actual	Max
Amplitude	200	313	500
Sine offset	-40	0.86	40
Cosine offset	-40	2.15	40

Coarse	Min	Actual	Max
Amplitude	100	198	300
Sine offset	-50	-25.20	50
Cosine offset	-50	13.50	50

Medium	Min	Actual	Max
Amplitude	N/A	N/A	N/A
Sine offset	N/A	N/A	N/A
Cosine offset	N/A	N/A	N/A

Tested by: Natalya M.

Date: 26/04/2022 16:59

Tested with SW version: 5.0.0

Status: Passed