


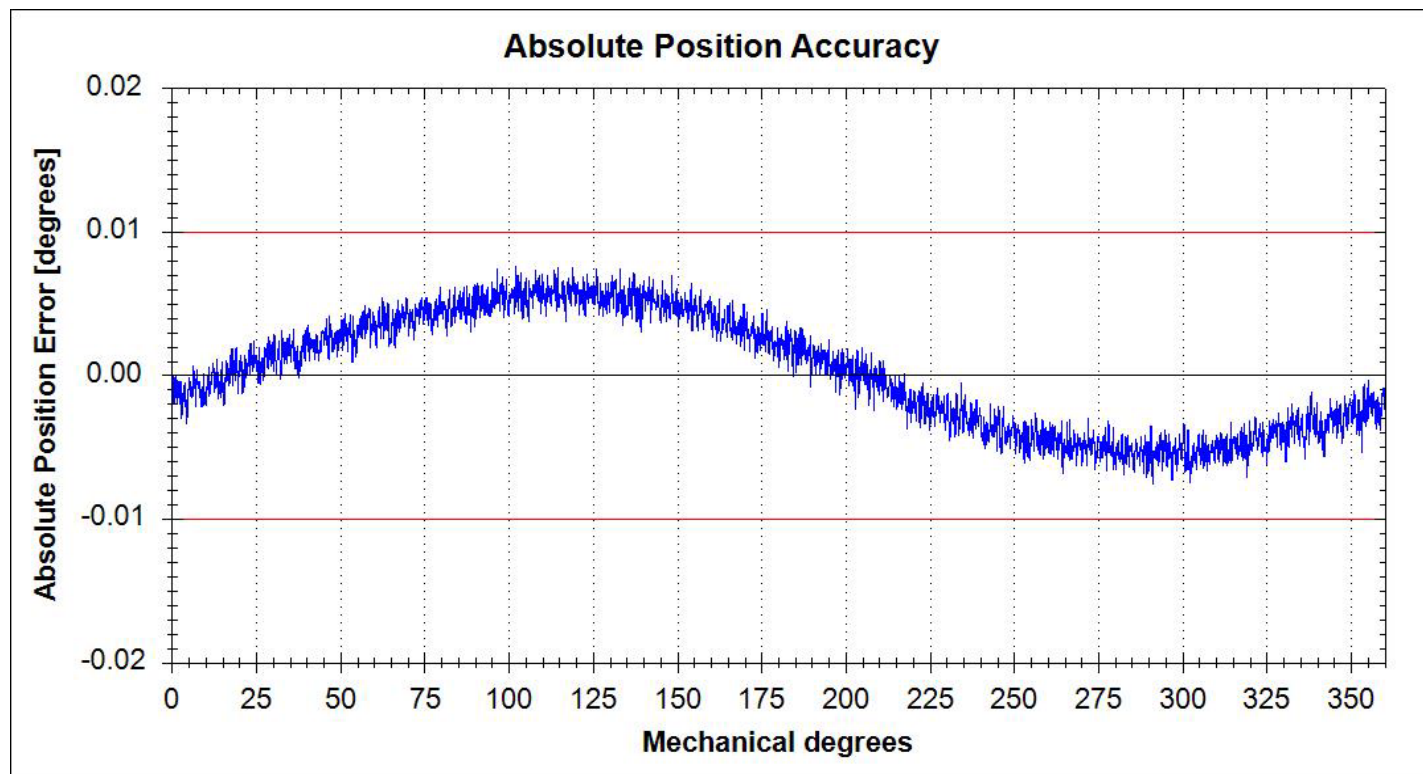

Number of sampled points: 3600

Error [degrees]: ± 0.0076

Error limit [degrees]: ± 0.0100

Encoder parameters	
CAT#	VLP-80-SI-S0
Serial Number	230400034
Resolution	1048576 (20 bits)
ECR: Fn/Crs/Med	64/3/8
BIT	Disabled
FW version	4.3.9
UUT revision	5



Tested by: oferbe

Date: 26/01/2023 14:29

Tested with SW version: 6.1.9

Status: Passed

Average Amplitudes and Offsets[mV]

Fine	Min	Actual	Max
Amplitude	200	342	510
Sine offset	-15	-8.26	15
Cosine offset	-15	0.50	15

Coarse	Min	Actual	Max
Amplitude	100	148	300
Sine offset	-20	1.36	20
Cosine offset	-20	-12.21	20

Medium	Min	Actual	Max
Amplitude	30	59	100
Sine offset	-20	-1.08	20
Cosine offset	-20	-0.07	20